



SUBMITTAL DRAWING
CTB
CEILING THERMAL BLANKET

STANDARD CONSTRUCTION


MATERIAL

1/4" thick 6 pound density Ceramic fibre
used for fire damper
For use with U.L Classified
Ceiling Radiation Dampers
1/2" thick 8 pound

Available in sizes

- 12" x12"
- 12"x24"
- 24"x24"

CTB2424

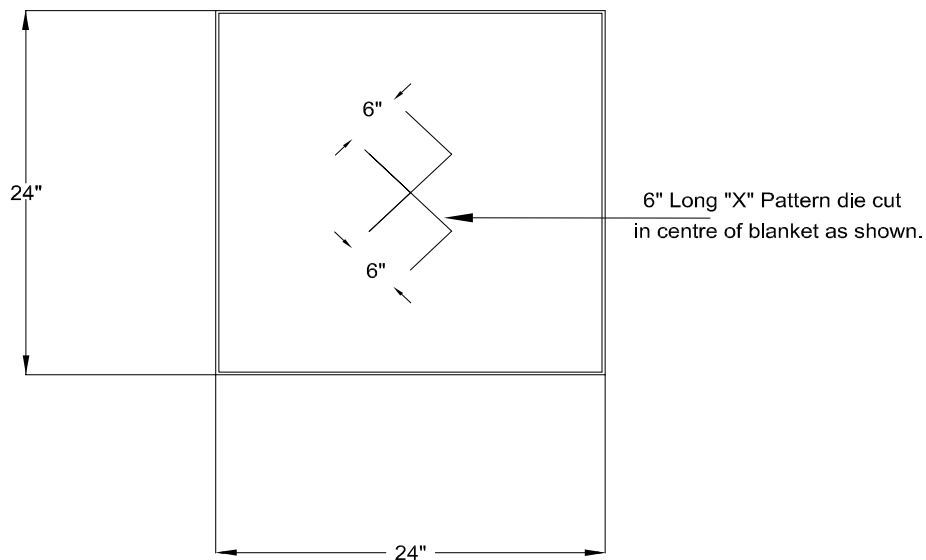

For field installation on the back of steel
"lay-in" diffusers, or tapered neck
diffusers in ceiling applications.



UNDERWRITERS LABORATORIES (UL555)
CLASSIFIED FIRE DAMPERS
FIRE RESISTANCE RATED 3 HOURS.
FOR USE IN UL CLASSIFIED BUILDING
MATERIALS RATED 4 HOURS OR LESS.

Project:
Location:
Architect
Engineer:

Contractor:
Address:
P.O. Number:
Date: