



SUBMITTAL DRAWING
AMI - CD 300 M
MANUAL BALANCING DAMPERS

STANDARD CONSTRUCTION

FRAME

5" x 16 ga. galvanized steel channel with corner braces.

BLADES

6" and 8" maximum width 16 ga. galvanized steel.

FINISH

Mill galvanized

LINKAGE

Concealed in frame.

BEARINGS

Bronze Oilite

AXLES

1/2" sq plated steel.

MAXIMUM SIZE

Single section - 48"w x 48"h

MULTIPLE SECTIONS ASSEMBLY

96"w x 96"h. Each section operates independently. Requires one hand quadrant per section.

MINIMUM SIZE


6"w x 6"h. Dampers under 10" nominal are single blade.

Unit supplied approximately 1/4" smaller than given duct dimensions.

OPTIONS

Available at extra cost:

- Hand Quadrants
- Parallel Blades
- Opposed Blades

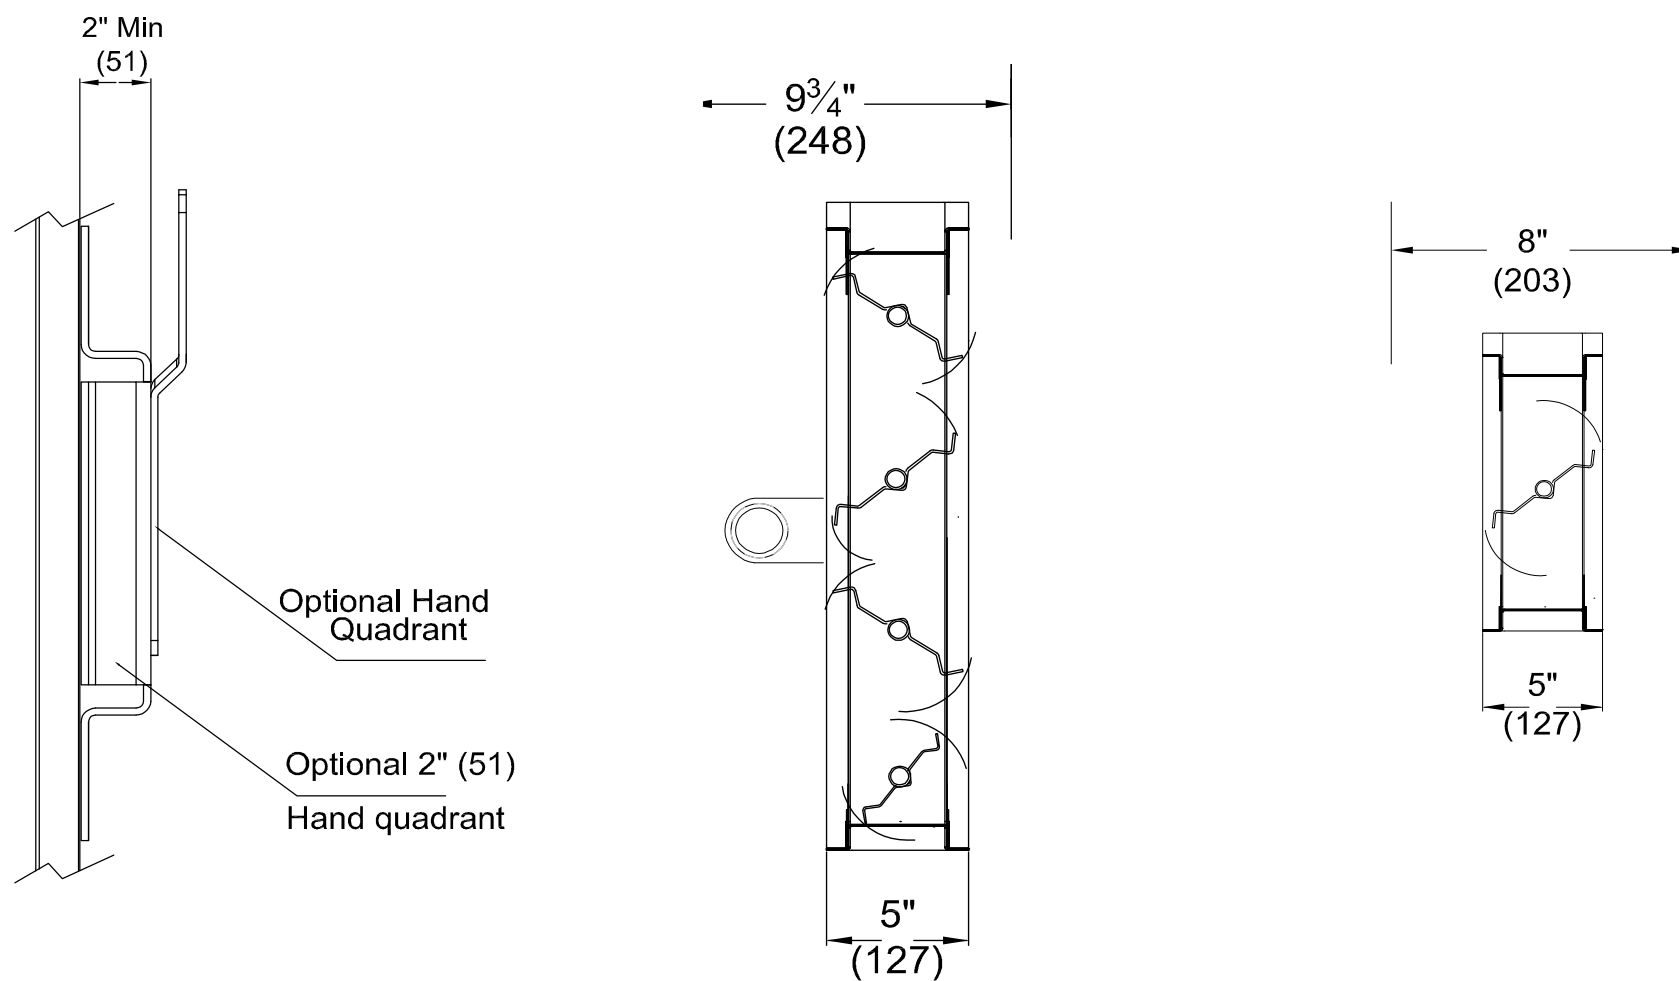

Project:
Location:
Architect
Engineer:

Contractor:
Address:
P.O. Number:
Date: